



PRODUCT DATA SHEET

GRAPHITE HD ADDITIVE SF

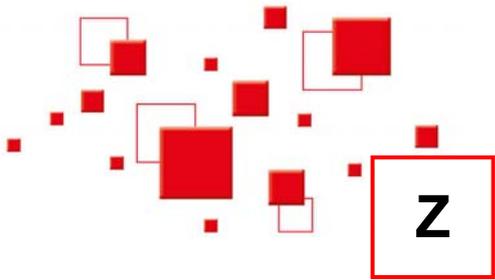

Application

plasticizer for plastic painting



Description:

- good leveling
- high flexible
- easy to mix

Remarks:

The substrate should be clean, free of dust, rust, oil and grease

Special remarks

- The products are suitable for professional use only.
- It cannot be ruled out that this product contains particles < 0.1 µm



Paint process

Spreading rate

Solid content

74 %



Pre-mix

100:25 (100 parts paint e.g. GHD TOPCOAT or PUR Primer... and 25part ADDITIVE SF) use mixing stick.
For other mixtures see corresponding TDS.



Mixing ratio



Hardener



Reducer



Spray viscosity DIN 4 / 20°C

Remarks



Useable in CV products GHD CHASSIS SURFACER, PRIMER FILLER MP, SURFACER WHITE and RM line GHD TOPCOAT.
Products require longer drying times when containing Sofface additive

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our products, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the products for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein are for general information purpose only; they may change without prior information and do not constitute the agreed contractual quality of the products (product specification). The latest version supersedes all previous versions. You can obtain the latest version from our website at www.rmpaint.com or directly from your sales partner. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed.

R-M Automotive Refinish Paints, Z.I. du Merret F-60676 Clermont de l'Oise Cedex, Tel. (+33) (0) 3 44 77 77 77

06/2016

Perfection made simple

